


OKBRAND

MAX-TIGHT FIELD FENCE

OKBRAND Max-Tight Field Fence is manufactured using the Max-Tight Square Knot. Manufactured in a four heights, featuring a graduated spacing that starts with small openings at the bottom which helps prevent entry from small animals. The Max-Tight square knot provides extra vertical strength to withstand impact from large animals while flexible enough for installation over hilly terrain.

As with all OKBRAND Max-Tight products our field fence has the added benefit of our unique "Versi-Tail" feature. This feature allows for easier installation by adding a 8" tail at the beginning of each roll and a 8" tail at each end. This feature eliminates the need to remove cross-wire staples to allow enough wire for tying corners or splicing rolls.

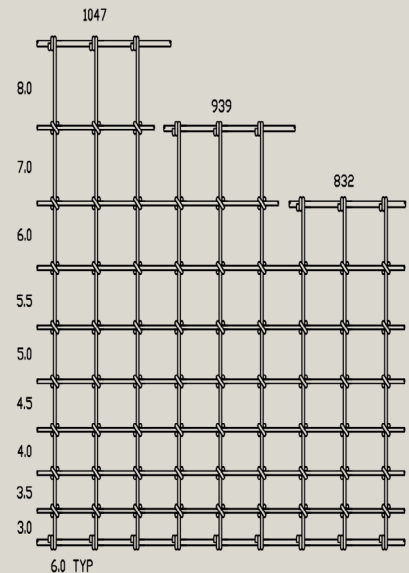

MAX-TIGHT FIELD FENCE - CLASS I OR CLASS III ZINC COATING

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	FILLER WIRE GA.	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
832-6-12.5	8	32"	6"	12.5	10	330'	143	8	Green
939-6-12.5	9	39"	6"	12.5	10	330'	163	8	Green
1047-6-12.5	10	47"	6"	12.5	10	330'	182	8	Yellow
1472-6-12.5	14	72"	6"	12.5	10	330'	261	8	Yellow

Recommended for:



Oklahoma Steel & Wire
1042 S. 1st Street
Madill, Oklahoma 73446
800.654.4164



okbrand.com

Iowa Steel & Wire
1500 West Van Buren
Centerville, Iowa 52544
800.325.5118